

WALL MOUNTED FAUCETS


37-58



D28 SERIES 39



TUBULAR SERIES 41



MALMO SERIES 47



EXTREME WM SERIES 48




QUADRAT SERIES 49



NARA Q 51



CUBICA SERIES 51



APOLLO AL 52



MEDICAL SERIES 53



APOLLO FREE 55



BEHIND THE MIRROR SOLUTIONS 56



PROX, WAVE & TOUCH SOLUTIONS 57

D28 SERIES

ELECTRONIC WALL MOUNTED FAUCET




Operated by IR sensor. For cold or premixed water.


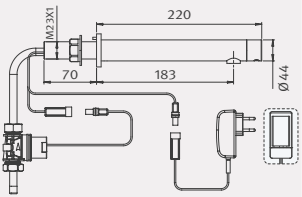

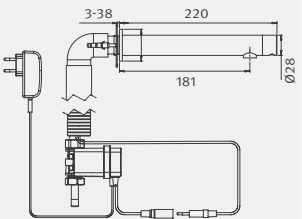

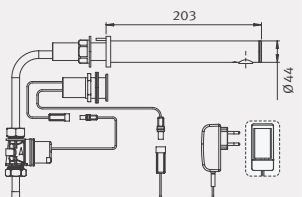
Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Lead free (D28 & D28 prox models).
- Suits any washroom due to its minimalist design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Honeycomb TT Laminar
1.89 LPM	0.5 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	D28 B	Concealed installation in plaster or dry walls.	9V Battery	352000	
	D28 E	Iron frame available	9V Transformer	352100	
	D28 DUAL POWER B	Concealed installation in plaster or dry walls as well as concrete, brick walls. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium Battery, which enables the product to be used normally in case of a power failure. Iron Frame available (see page 121)	9V Battery	352300	
	D28 DUAL POWER E		9V Transformer	352400	
	D28 PROX	Concealed installation in plaster or dry walls. Prox sensor unit	9V Battery	352600	
	D28 PROX E		9V Transformer	352610	

D28 TOUCH SERIES

ELECTRONICALLY OPERATED SELF CLOSING FAUCET OPERATED BY TOUCH

Features a Piezo element integrated in the faucet cap. For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Honeycomb TT Laminar
1.89 LPM	0.5 GPM	PCA Spray

DUAL POWER OPERATION

Powered by an external IP67 Dual power input box, allows the faucet to be used with a 9V battery or a 9V transformer. The product could also be powered by a 9V transformer and an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	D28 TOUCH DUAL POWER B	Concealed installation in plaster dry walls or brick concrete walls	9V Battery	352700	
	D28 TOUCH DUAL POWER E		9V Transformer	352710	

TUBULAR SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water, long spout and various installation options.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Suits any washroom due to its minimalist design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray


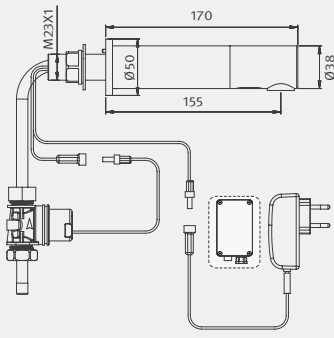

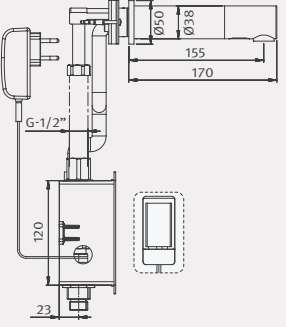

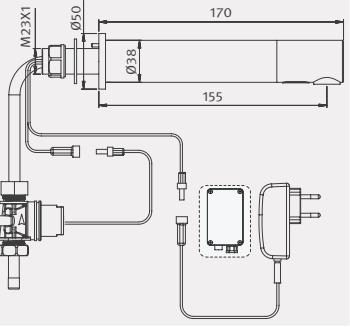

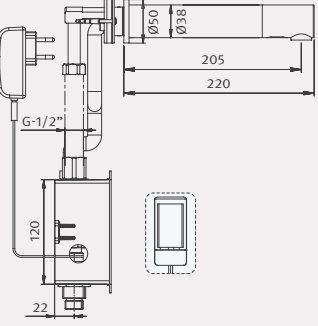

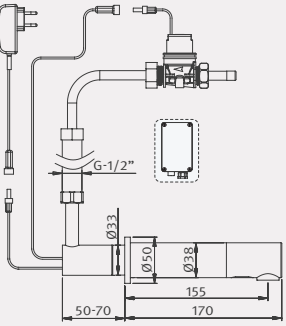



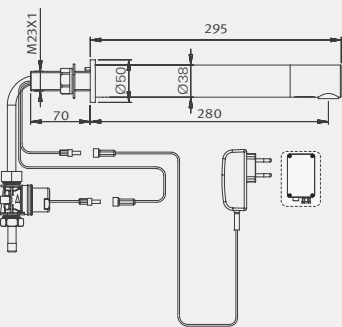

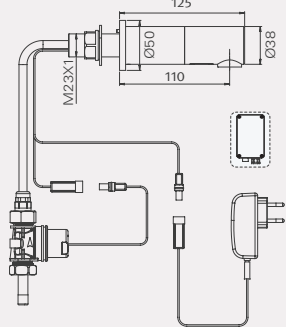

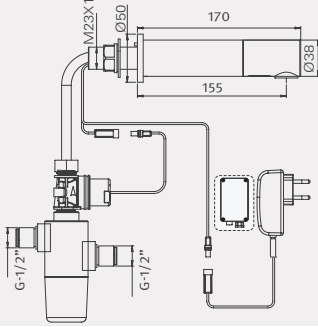

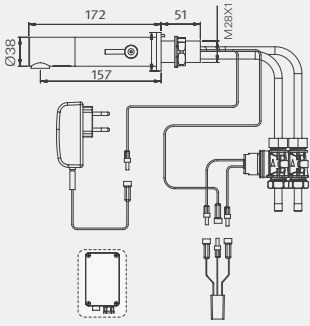

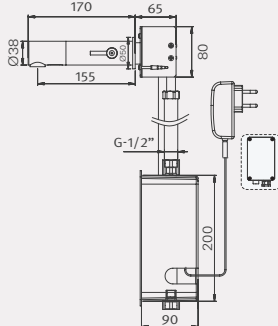
THERMOSTATIC MIXING

Present in Tubular TB & Tubular TE

Integrated thermostatic mixing valve allowing the maintenance staff to adjust the water temperature without giving that possibility to the end user.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR B	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	350200	
	TUBULAR E		9V Transformer	350100	
	TUBULAR 2030 B	Concealed installation in concrete or brick walls	9V Battery	350300	
	TUBULAR 2030 E		9V Transformer	350400	
	TUBULAR LB	Concealed installation in plaster or dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	350210	
	TUBULAR LE		9V Transformer	350120	
	TUBULAR 2030 LB	Concealed installation in concrete or brick walls. Long spout 220 mm	9V Battery	350310	
	TUBULAR 2030 LE		9V Transformer	350410	
	TUBULAR CB	Installation from ceiling	6 x 1.5 AA Batteries	350500	
	TUBULAR CE		9V Transformer	350600	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR XLB	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	350215	
	TUBULAR XLE		9V Transformer	350415	
	TUBULAR PERTH B	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	350207	
	TUBULAR PERTH E		9V Transformer	350107	
	TUBULAR TB	Concealed installation in plaster or dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	350202	
	TUBULAR TE		9V Transformer	350102	
	TUBULAR 1000 B	Concealed installation in plaster or dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	350800	
	TUBULAR 1000 E		9V Transformer	350850	
	TUBULAR 1000 B BOX	Installation in concrete or brick walls	9V Battery	350900	
	TUBULAR 1000 E BOX		9V Transformer	350950	

TUBULAR WAVE DP LE

ELECTRONIC WALL MOUNTED FAUCET

Operated by wave on-off IR sensor.

For cold or premixed water.

Including options for installation with iron frame.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Suits any washroom due to its minimalist design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

WAVE OPERATION

Allows activation of the faucet once the users place their hands at a close proximity to the sensor.

Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.



LEED RATING



SOAP & WATER



IRON FRAME AVAILABLE



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
---------	--------------	----------------	--------------	-------------	---------




TUBULAR WAVE DP LE

Concealed installation in plaster or dry walls as well as concrete, brick walls.
Dual power input box.
When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.
Iron frame available (see page 121)

9V Transformer

350190

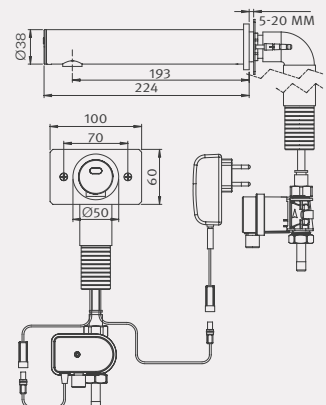

TUBULAR TOUCH SERIES

ELECTRONICALLY OPERATED SELF CLOSING FAUCET OPERATED BY TOUCH

Features a Piezo element integrated in the faucet cap. For cold or premixed water.

Includes ring illuminated versions (electricity operated only).

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Cache
1.89 LPM	0.5 GPM	Cache PCA Spray



LEED RATING



SOAP & WATER



LED COLORS


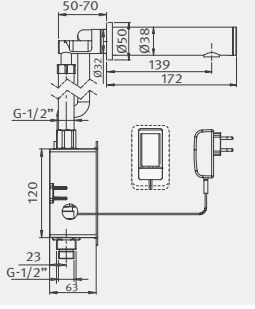

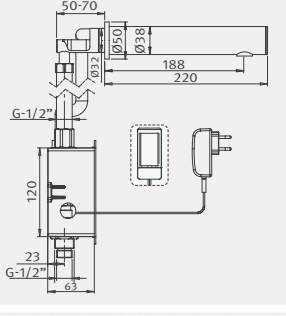

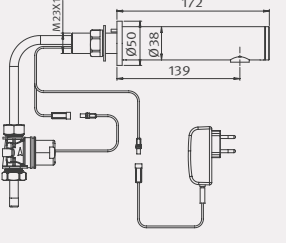

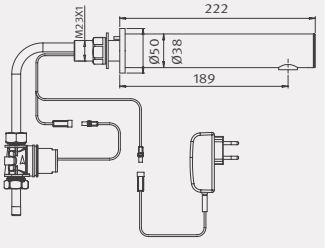

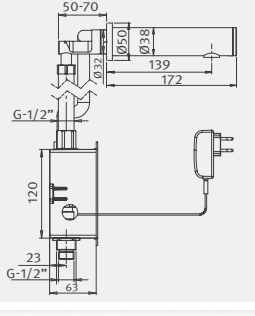

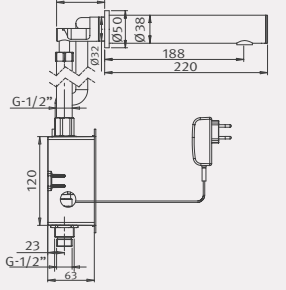
RING ILLUMINATION

Present in Tubular touch BRE, Tubular touch BR LE, Tubular Touch2030 BRE & Tubular Touch 2030 BR LE

Features a ring of light. When a user touches the designated area in the middle of the ring of light a flow cycle of 8 seconds is completed. The ring of light blinks while water runs out of the faucet. If the user does not need more water, he can touch the piezo area again to stop the water flow before the default time has passed, therefore, saving more water.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR TOUCH B	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	350140	
	TUBULAR TOUCH E		9V Transformer	350130	
	TUBULAR TOUCH LB	Concealed installation in plaster or dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	350250	
	TUBULAR TOUCH LE		9V Transformer	350150	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR TOUCH 2030 B	Concealed installation in concrete or brick walls	9V Battery	350350	
	TUBULAR TOUCH 2030 E		9V Transformer	350450	
	TUBULAR TOUCH 2030 LB	Concealed installation in concrete or brick walls. Long spout 220 mm	9V Battery	350320	
	TUBULAR TOUCH 2030 LE		9V Transformer	350420	
	TUBULAR TOUCH BRE	Concealed installation in plaster or dry walls. Ring Illumination	9V Transformer	350170	
	TUBULAR TOUCH BR LE	Concealed installation in plaster or dry walls. Ring Illumination	9V Transformer	350180	
	TUBULAR TOUCH 2030 BRE	Concealed installation in concrete or brick walls. Ring Illumination	9V Transformer	350460	
	TUBULAR TOUCH 2030 BR LE	Concealed installation in concrete or brick walls. Ring Illumination	9V Transformer	350330	

MALMO SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor. Solenoid valve, sensor and battery are integrated in the spout.

Series includes options for cold or premixed water as well as hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Since the sensor, solenoid and battery are inside the body, servicing can be done from the front.
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray




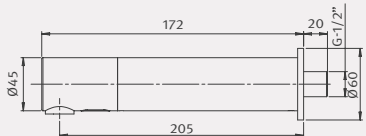
LEED RATING


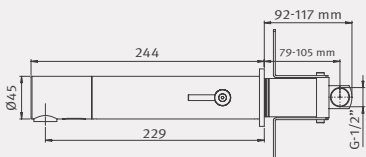


SOAP & WATER



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
---------	--------------	----------------	--------------	-------------	---------

	MALMO	Concealed installation in concrete, brick walls	9V Battery	225865	
---	--------------	---	------------	---------------	---

	MALMO 1000	Concealed installation in concrete, brick walls. Mixer to adjust water temperature	9V Battery	225860	
---	-------------------	---	------------	---------------	---

EXTREME WM SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor. For cold or premixed water.
Series includes options for wave or prox operation and long spout models.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Sensor settings adjustable by remote control
- Easy installation

WAVE OPERATION

Allows activation of the faucet once the users place their hands at a close proximity to the sensor.

Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



LEED RATING



SOAP & WATER



WAVE & PROX OPTIONS

PROX OPERATION

Allows automatic activation when the users bring their hands within the sensor range, and stops when the users remove their hands.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME WM B	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	340300	
	EXTREME WM E		9V Transformer	340200	
	EXTREME WM LB	Concealed installation in plaster or dry walls. Long spout 265 mm	6 x 1.5 AA Batteries	340400	
	EXTREME WM LE		9V Transformer	340500	

QUADRAT SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor.

Series includes options for cold or premixed water, long spout models and various installation options.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- * Unique square design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



LEED RATING



SOAP & WATER



IRON FRAME AVAILABLE



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	QUADRAT B	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	351100	
	QUADRAT E		9V Transformer	351200	
	QUADRAT LB	Concealed installation in plaster or dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	351105	
	QUADRAT LE		9V Transformer	351205	
	QUADRAT 2030 B	Concealed installation in concrete or brick walls	9V Battery	351300	
	QUADRAT 2030 E		9V Transformer	351400	
	QUADRAT 2030 LB	Concealed installation in concrete or brick walls. Long spout 220 mm	9V Battery	351305	
	QUADRAT 2030 LE		9V Transformer	351405	

NARA Q SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor. For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Concealed installation, all components inside the box which makes it serviceable from the front.
- Sensor settings adjustable by remote control
- Matching flush valves for toilets and urinals
- Easy installation

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA Q	Concealed installation in concrete, brick walls	9V Battery	360510	
	NARA QE		9V Transformer	360500	

CUBICA SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor. For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Luxury rectangular design
- Sensor settings adjustable by remote control
- Easy installation

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Cache
1.89 LPM	0.5 GPM	Cache PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	CUBICA B	Concealed installation in plaster or dry walls	6 x 1.5 AA Batteries	360100	
	CUBICA E		9V Transformer	360200	
	CUBICA 2030 B	Concealed installation in concrete, brick walls.	9V Battery	360300	
	CUBICA 2030 E	Long spout 265 mm	9V Transformer	360400	

APOLLO AL SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor.

For cold or premixed water.

Includes options for wave or prox operation, and accessories for brick wall installation.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Ideal for the healthcare and mental care institutions where suicide prevention regulations apply.
- Sensor settings adjustable by remote control
- Easy installation

WAVE OPERATION

Allows activation of the faucet once the users place their hands at a close proximity to the sensor .

Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.

PROX OPERATION

Allows automatic activation when the users bring their hands within the sensor range, and stops when the users remove their hands.

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



LEED RATING



SOAP & WATER



STERN MEDICAL



WAVE & PROX OPTIONS



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	APOLLO ALB	Concealed installation in plaster or dry walls	9V battery	340600	
	APOLLO ALE		9V Transformer	340700	

EXTENSION KIT APOLLO AL	For brick wall installations	07240060	
EXTENSION KIT FOR WAVE / PROX SENSOR (REQUIRES A SPECIAL MATCHING SENSOR)		07240061	

MEDICAL SERIES

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor.

features an integrated thermostatic mixer for an anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Thermostatic control for optimum temperature
- Ideal for healthcare institutions
- Chrome plated brass body with metallic thermostatic handle.
- Ideal for retrofit installations
- Sensor settings adjustable by remote control
- Internal solenoid valve
- Easy installation

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray




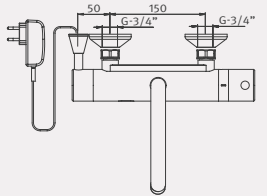

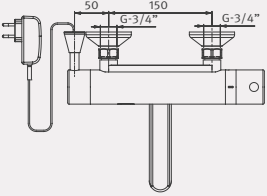

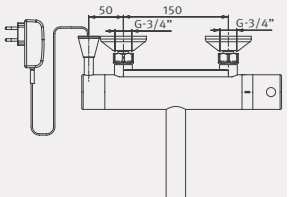
LEED RATING



PREVENT SCALDING



STERN MEDICAL

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	APOLLO MEDICAL FB	Exposed installation Gooseneck spout	9V Battery	314530	
	APOLLO MEDICAL FE		9V Transformer	314540	
	APOLLO MEDICAL B	Exposed installation Swivel spout	9V Battery	314500	
	APOLLO MEDICAL E		9V Transformer	314510	
	MEDICAL 1000 TE	Exposed installation Body integrated spout	9V Transformer	314600	

9V BATTERY

COVER

ESCUTCHEON

ECCENTRIC

THERMOSTATIC CARTRIDGE INTEGRATED WITH A HOT LIMIT STOPPER

BATTERY COVER

METAL THERMOSTATIC MIXING HANDLE

INTEROPERABLE SOLENOID VALVE

FULL BRASS FAUCET BODY

REMOTE CONTROL

IR SENSOR:

- a. Body recognition program
- b. Sensor functions adjustable by remote control
- c. Various hygiene flush options available



APOLLO FREE

ELECTRONIC WALL MOUNTED FAUCET

Operated by IR sensor. Powered by an internal 9V battery. For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Since the sensor, solenoid and battery are inside the body, servicing is extremely easy
- Ideal for retrofit projects.
- Sensor settings adjustable by remote control
- Easy installation



WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	APOLLO FREE	Exposed installation	9V Battery	340100	

WASHFREE 1000

ELECTRONIC WALL MOUNTED FAUCET

Operated by wave IR sensor. For cold or premixed water. Includes option for a longer bracket.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Swivel spout
- Ideal for utility sinks.
- Since the sensor, the solenoid and the battery are inside the body, servicing is extremely easy.
- Ideal for retrofit installations
- Sensor settings adjustable by remote control
- Easy installation

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

WAVE OPERATION

Allows activation of the faucet once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor -again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	WASHFREE 1000	Exposed installation	9V Battery	316010	
	LONG BRACKET 200 MM			07055175	

BTM


ELECTRONIC WALL MOUNTED FAUCET TO BE INTEGRATED BEHIND THE MIRROR

Operated by IR sensor.

For cold or premixed water.


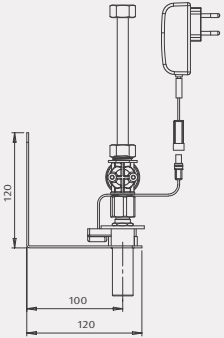
Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Sensor settings adjustable by remote control
- Easy installation behind the mirror
- Matching IR operated soap dispenser

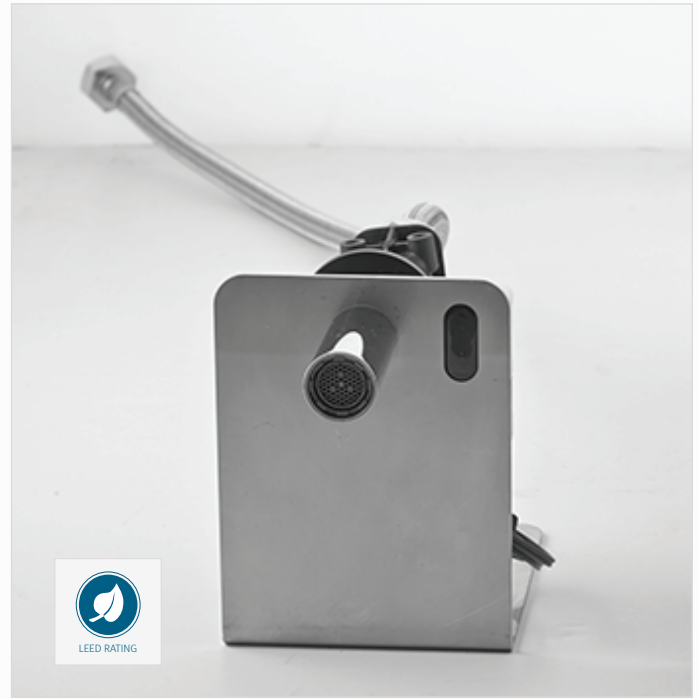

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Cache
1.89 LPM	0.5 GPM	Cache PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	BTM E	Installation Behind the mirror.	9V transformer	280300	


SOAP WATER AIR MODULE

ELECTRONIC WALL MOUNTED SYSTEM TO BE INTEGRATED BEHIND THE MIRROR

Combined system including faucet, soap dispenser and hand dryer operated by IR sensor. Features a manual integrated thermostatic mixer for anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Thermostatic control for optimum temperature
- Sensor settings and soap dosage adjustable by remote control (faucet & soap dispenser)
- Peristaltic pump. The soap is driven inside the soap tube without contact with the pump, preventing contamination and back flow.
- Accurate soap dosage
- To be used with non-proprietary soap for maximum savings.

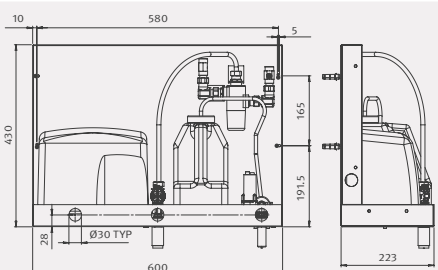PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
SOAP WATER AIR MODULE	Installation behind the mirror	12V transformer	280400	

PROX, WAVE & TOUCH SOLUTIONS

TOUCH FREE & TOUCH OPERATED FAUCET KITS

Operated by an IR sensor or a Piezo button.

To be integrated in a faucet application to deliver water with or without touch.

For cold or premixed water.

Advantages:

TOUCH FREE OPERATION:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Sensor settings adjustable by remote control

TOUCH OPERATION:

- Drastically reduces water consumption
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site

TOUCH FREE WAVE OPERATION

Allows activation of the faucet / unit once the users place their hands at a close proximity to the sensor.

Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.

TOUCH FREE PROX OPERATION

Allows automatic activation when the users bring their hands within the sensor range, and stops when the users remove their hands.

TOUCH OPERATION

Allows activation of the faucet / unit once the users touch the designated area of the Piezo button. Water will shut off if the users touch the designated area again or once a factory set flow time of 8 seconds will pass.



LEED RATING



WAVE & PROX OPTIONS



Prox Kit for faucets



PPS Kit for faucets



PICTURE

PRODUCT NAME

MODEL FEATURES

POWER SUPPLY

CODE NUMBER

DRAWING



PROX KIT FOR FAUCET

Touch free prox operation.

9V Battery / 9V Transformer

620200

WAVE KIT FOR FAUCET

Touch free wave operation.

9V Battery / 9V Transformer

620400





PPS KIT FOR FAUCET

Touch operation

9V Battery / 9V Transformer (not included)

07225008





D28 PROX
See page 39